

TECHN. DATEN (TECHNICAL DATA):

NENNDRUCK (NOMINAL PRESSURE) P_N 70 MPa (700bar)
 PRÜFDRUCK (TEST PRESSURE) P_p 84 MPa (840bar)
 GEWICHT (WEIGHT) 16,3 kg
 (INKL. 0,3m SCHLÄUCHE U. KUPPLUNGEN; INCL. 0,3m HOSES AND COUPLINGS)
 ÖLBEDARF (REQUIRED OIL VOLUME) 0,1 l

STEUERUNG (SAFETY FEATURES)

SICHERHEITSSCHALTUNG ENTSPRECHEND EN 13204
 (WHEN CONTROL KNOBS IN NEUTRAL POSITION,
 OIL CIRCULATES WITHOUT EXERTING PRESSURE)

Schneidklasse (CUTTING CLASS):

EN 13204 (EDITION 03/2005) BC 165-F-16
 NFPA 1936 (EDITION 2005) A8/B6/C6/D7/E9



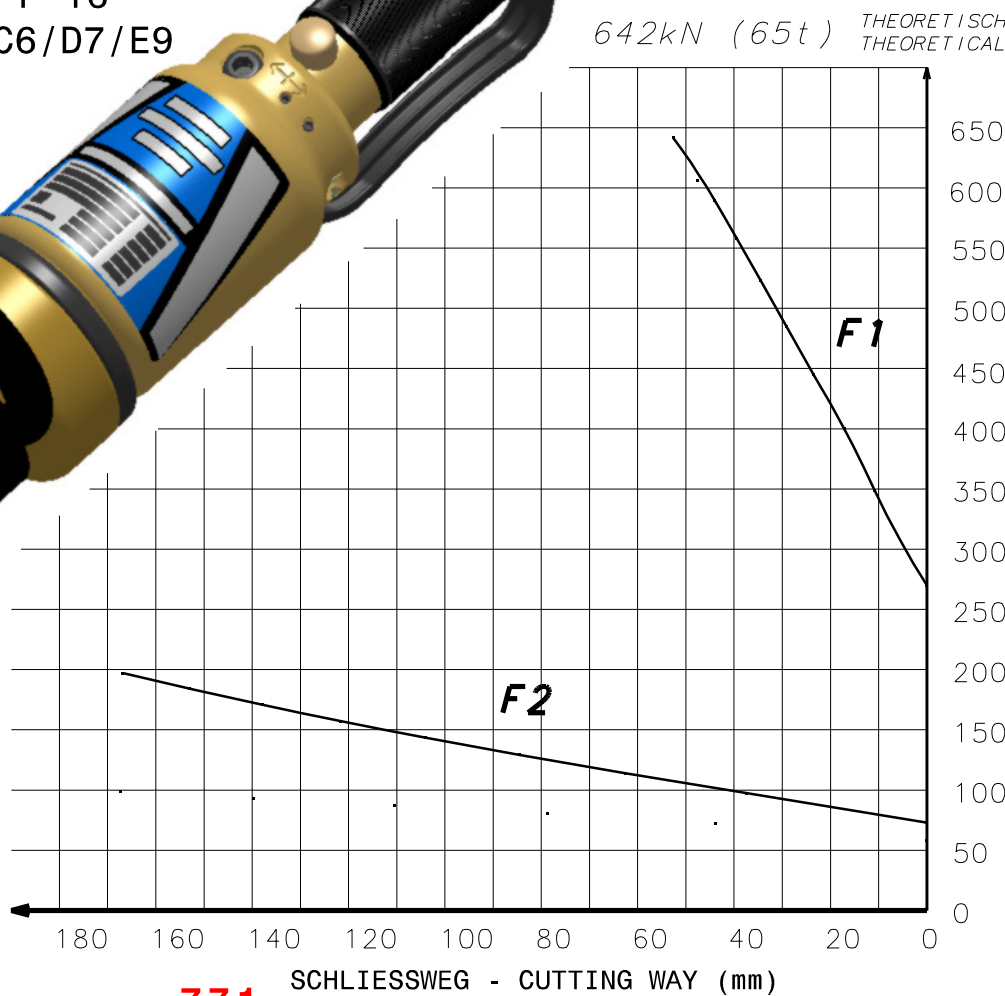


DIAGRAMM BEI 70MPa U. OHNE WIRKUNGSGRAD
 DIAGRAM AT 70MPa AND WITHOUT EFFICIENCY

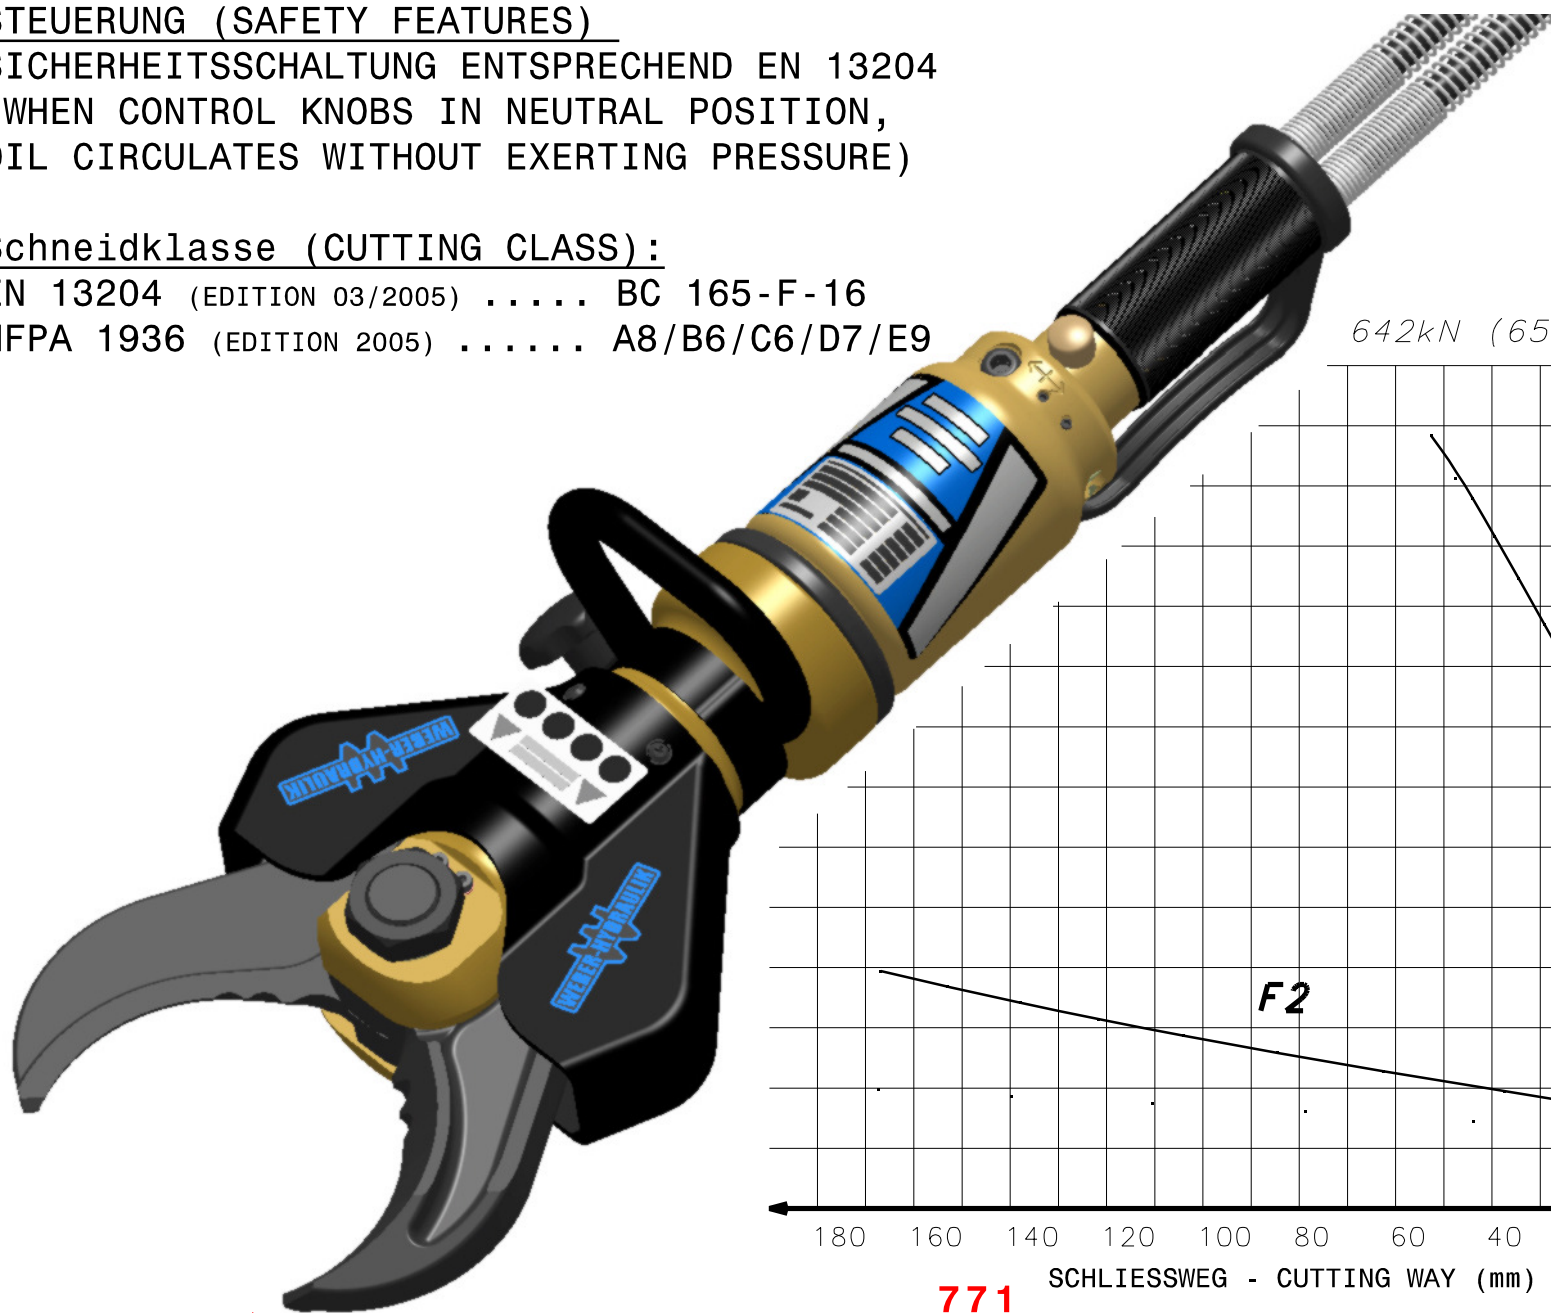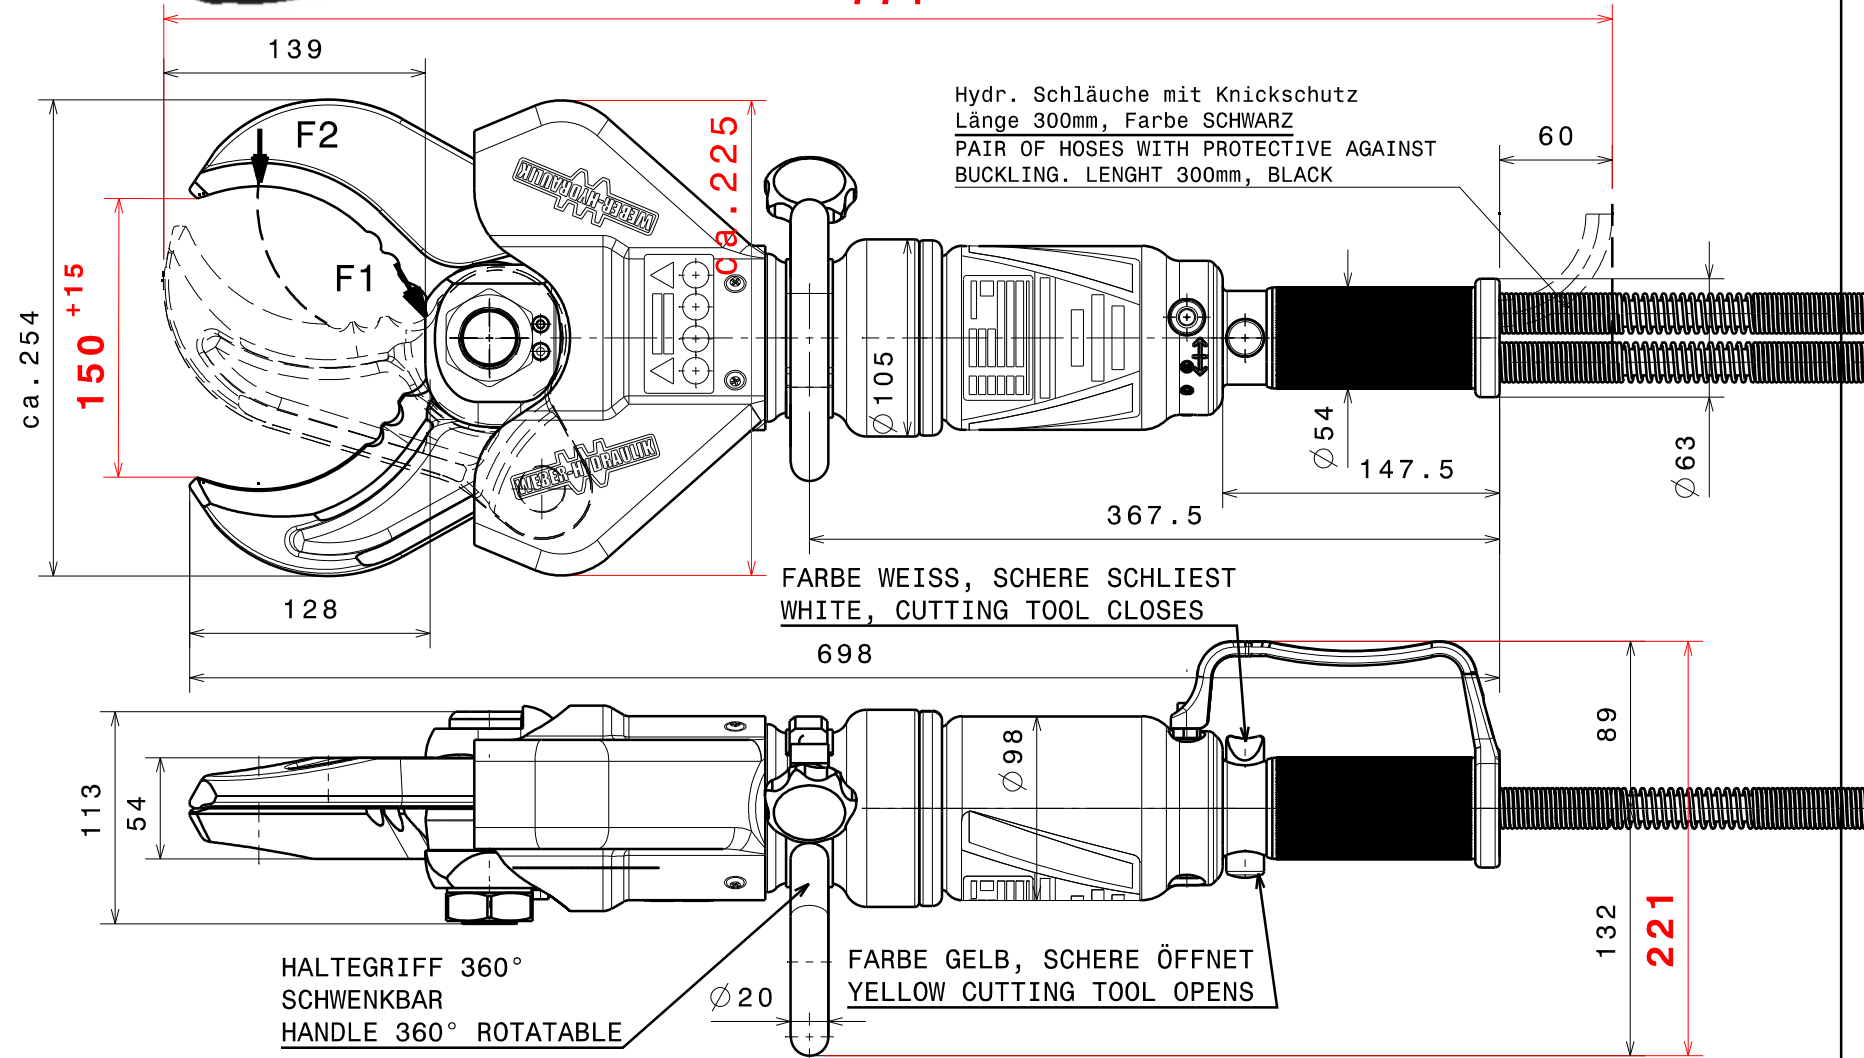

Hydr. Schläuche mit Knickschutz
 Länge 300mm, Farbe SCHWARZ
 PAIR OF HOSES WITH PROTECTIVE AGAINST
 BUCKLING. LENGHT 300mm, BLACK

FARBE WEISS, SCHERE SCHLIESST
 WHITE, CUTTING TOOL CLOSES

FARBE GELB, SCHERE ÖFFNET
 YELLOW CUTTING TOOL OPENS

HALTEGRIF 360°
 SCHWENKBAR
 HANDLE 360° ROTATABLE

FREIMASSTOLERANZEN (GENERAL TOLERANCES)	LAENGENMASS (LENGHT)mm	...50	50...250	250...1000	1000...	WINKELMASS (ANGLE)	...180°
	TOLERANZ (TOLERANCE)mm	±1,5	± 2,0	± 3,0	± 5,0	TOLERANZ (TOLERANCE)	±10°

GEPR. JSC
 CHECK.
 GEZ. KST
 DRAW.
 DAT. 14.11.05
 KST
 13.04.10
 GEÄND. MODIF.
 AEND.-DATUM
 MOD.-DATE
 AEND.-NR. 100266
 REVISION B