

The first simultaneous dual-mode handheld detector, MobileTrace expands the range of target explosives you can identify in a single sample for faster, more comprehensive security screening. GE's patented ITMS® (Ion Trap

Mobility Spectrometry) technology offers you the explosives and narcotics detection sensitivity and reliability proven at military bases, border crossings, airports, and other critical security checkpoints around the world.

MobileTrace™

Carry More Detection Power


To help keep ahead of the growing challenges of explosives and narcotics detection, MobileTrace packs the advanced capabilities of simultaneous dual-mode detection into a powerful, user-friendly handheld.

Unparalleled Detection Technology


- Simultaneous, dual-mode system for a broad range of explosives detection
- Detects explosives and narcotics simultaneously in seconds
- Advanced user interface with a wide range of capabilities
- State-of-the-art battery for long life, hot swappable for continued operation
- Ergonomic design for grab-and-go portability
- Easy-to-access components for quick maintenance
- Network ready/USB compliant




Sample Displays

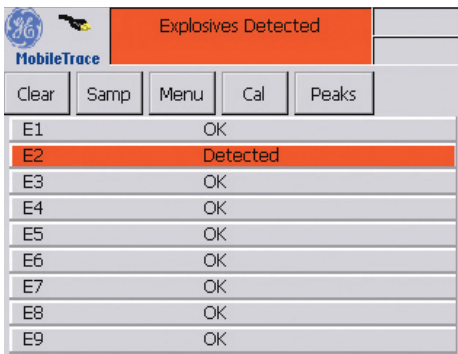

SelectScan view showing substances in code format to maintain privacy. User may use code settings or opt for default setting of non-coded displays.

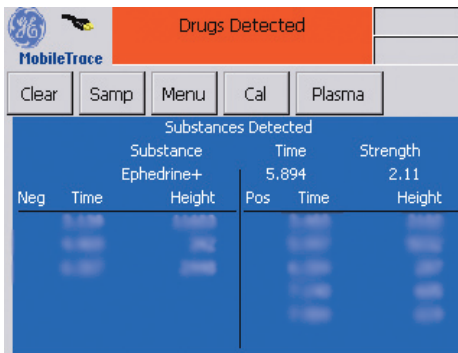

Peaks view is a tabular form of a Plasmagram view.

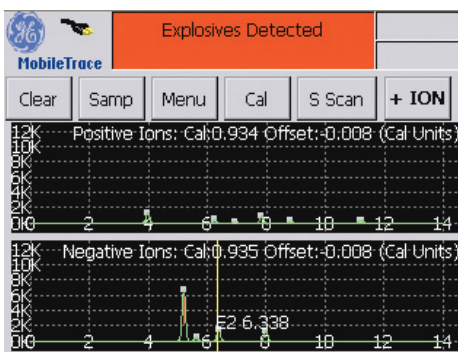

Plasmagram view shows peak height versus time-of-flight of the detected substance.

Broad Explosives Detection

Simultaneously test for a wide range of explosives and narcotics in seconds. While most explosives have negative ion affinity, some important explosives have positive ion affinity. MobileTrace uses the patented simultaneous dual-mode technology of GE's field-proven Itemiser® desktop system to detect both negative and positive ions at the same time. Historically, handhelds work in one mode at a time, and require changing components and additional samples to test for both types of ions. With MobileTrace, you can meet your mission-critical trace detection objectives with efficient throughput and ease of use across a range of substances.

Easy Operation, Rich Displays

The MobileTrace graphical interface is intuitive and easy to learn for new operators. Itemiser and EntryScan® users will find the operating system very familiar.

Data is evaluated on a 3.5 in. (8.9 cm) color screen using five display options:

- SelectScan for a simple list of alarm/no alarm status of substances in the library
- Peaks view for a tabular form of time-of-flight and height of peaks detected
- Plasmagram for a graphical representation of peaks detected
- 3-D view and Intensity Map for analytical interpretation (not shown)

To accommodate a range of lighting situations, MobileTrace is designed with adjustable display brightness.

Ergonomic Design

MobileTrace is designed for operator comfort as well as productivity. The instrument features sampling controls on the top and back of the system, which help make positioning the instrument easy. A comfortable hand-grip and shoulder strap help ease stress. The lightweight design improves maneuverability, and for those tight spaces, MobileTrace comes with a sampling wand for particulate collection.

Particle and Vapor Sampling

MobileTrace gives you the flexibility to swipe surfaces for trace particles or to analyze vapors.

Particle swipe. MobileTrace conveniently uses standard GE sample traps. The Teflon®-coated traps are swiped across a surface and inserted into the system for analysis. Typical sampling objects include clothing, skin, baggage, cargo, vehicles, containers, tickets and ID cards.

Vapor sampling. Vapors are drawn through a nozzle directly into the system for analysis. Typical sampling objects include cargo containers, car trunks and luggage.

Optimal Detection in a Compact Design

Sensitivity/Selectivity

- Patented simultaneous detection of both positive and negative ions enables detection and identification of a broad range of explosives, while also detecting narcotics
 - Patented ITMS technology detects microscopic traces of substances rapidly and accurately
 - Semi-permeable membrane filters out dust and dirt for reliable operation in harsh environments with high traffic, humidity or contamination
-

Versatile

- Three default user levels (operator, maintenance and administrator) for access control
 - State of the art networking capability and USB connectivity enabling users to transfer files to desktop or laptop, print files to a USB printer, display screen on remote device such as monitor or projector for training purposes, and other functions
 - ITMS desktop software enables file management, analysis and printing
 - Option to use substance codes instead of substance names for privacy and security
 - Expandable libraries accommodate unique user requirements
-

Easy to Use

- Touch screen with text or icon menus, 3.5 in. (8.9 cm) color, glare resistant display
 - Navigation pad, touch screen keypad and optional keyboard
 - Easy-to-learn graphical interface
 - Semi-automated or manual calibration
 - Easy access to components for efficient maintenance
 - Some local language options available
-

Portable

- Lightweight 9.4 pounds (4.3 kg) with battery
 - Shoulder strap and easy-access sample trigger buttons
 - Two batteries, up to four hours, with plug-in charger or in-unit trickle charge
 - Internal back-up batteries for maintaining uptime while swapping main battery
 - 12 VDC vehicle adapter for charging during transport
-

Reliable

- Auto-save to prevent data deletion
 - Solid state flash hard disk
 - Tough against the elements, with protective desorber guard
-

Cost Effective

- Simultaneous dual-mode testing allows for high throughput, less labor and reduced capital investment
 - Shared components with other GE trace detectors may reduce consumables costs, ordering expenses and inventory requirements
-

Worldwide Locations

7151 Gateway Boulevard
Newark, CA 94560 USA
Tel: +1 510 739 2400
Fax: +1 510 739 6400
Email: sales.homelandprotection.us@ge.com

Kouterveldstraat 2
1831 Diegem, Belgium
Tel: +32 (02) 725 11 20
Fax: +32 (02) 721 40 47
Email: sales.homelandprotection.uk@ge.com

205 Lowell Street
Wilmington, MA 01887 USA
Tel: +1 800 433 5346
Fax: +1 866 249 9105
Outside the U.S.: +1 978 658 3767

Washington, DC USA
Tel: +1 866 430 1913
Fax: +1 202 637 4232
Outside the U.S.: +1 978 658 3767

Cambridge, UK
Tel: +44 (0) 1223 728888
Fax: +44 (0) 1223 728889

Gladesville, Australia
Tel: +61 2 9844 6222
Fax: +61 2 9844 6983

www.gesecurity.com

Specifications

Detector Type:

Ion Trap Mobility Spectrometer (ITMS)

Analysis Time:

Default 8 seconds

Sample Acquisition:

Particle swipe or vapor sampling

Warmup Time:

Allow 30 minutes for system to stabilize; typical operation is 24x7

Operating Temperature:

0 to 50°C (32 to 122°F), up to 95% RH (non-condensing)

Storage Temperature:

-20 to 60°C (-4 to 140°F), up to 95% RH (non-condensing)

Power:

115/230 VAC, 50/60 Hz

12 VDC, vehicle adaptor (cable included)

Two rechargeable Li-Ion batteries, up to four hours, charger included

Internal back-up batteries to maintain power while swapping batteries

Computer:

Industrial grade, single-board computer, solid-state hard disk

1 GB file storage capacity

Ethernet and USB connectivity

Display:

3.5 in. (8.9 cm), transfective QVGA color LCD with adjustable LED backlight

Touch screen with screen-based keyboard

Output to five different display types including substance listing, time-of-flight plasmagram and tabular displays, 3-D and Intensity Map

Detection Modes:

Explosives optimized

Narcotics optimized

Vapor Mode

Certifications:

CE; ISO9001; Compliant to International Safe Transit Association (ISTA), Procedure 2A, standards

Dimensions

MobileTrace Unit

Length	16.1 in (409 mm)
Width	6.0 in (152 mm)
Height	12.4 in (315 mm)
Weight (with battery)	9.4 lbs (4.3 kg)

Handwand

Length	11 in (279 mm)
Diameter	1.1 in (28 mm)
Weight	2.3 oz (65 g)

