


# IBT Series Square Drive Hydraulic Torque Wrench

## Technical Specifications

The versatility of the IBT makes it the ideal general purpose and maintenance tool. A detachable square drive allows the fitting of Interchangeable direct fit outputs, including impact sockets, and male hexagonal Allen drives for the safe tightening and loosening of socket head cap screws. The 360 degree splined reaction, square drive anti-reverse ratchet, and 360 degree swivel connection, increases the flexibility of the IBT tool.

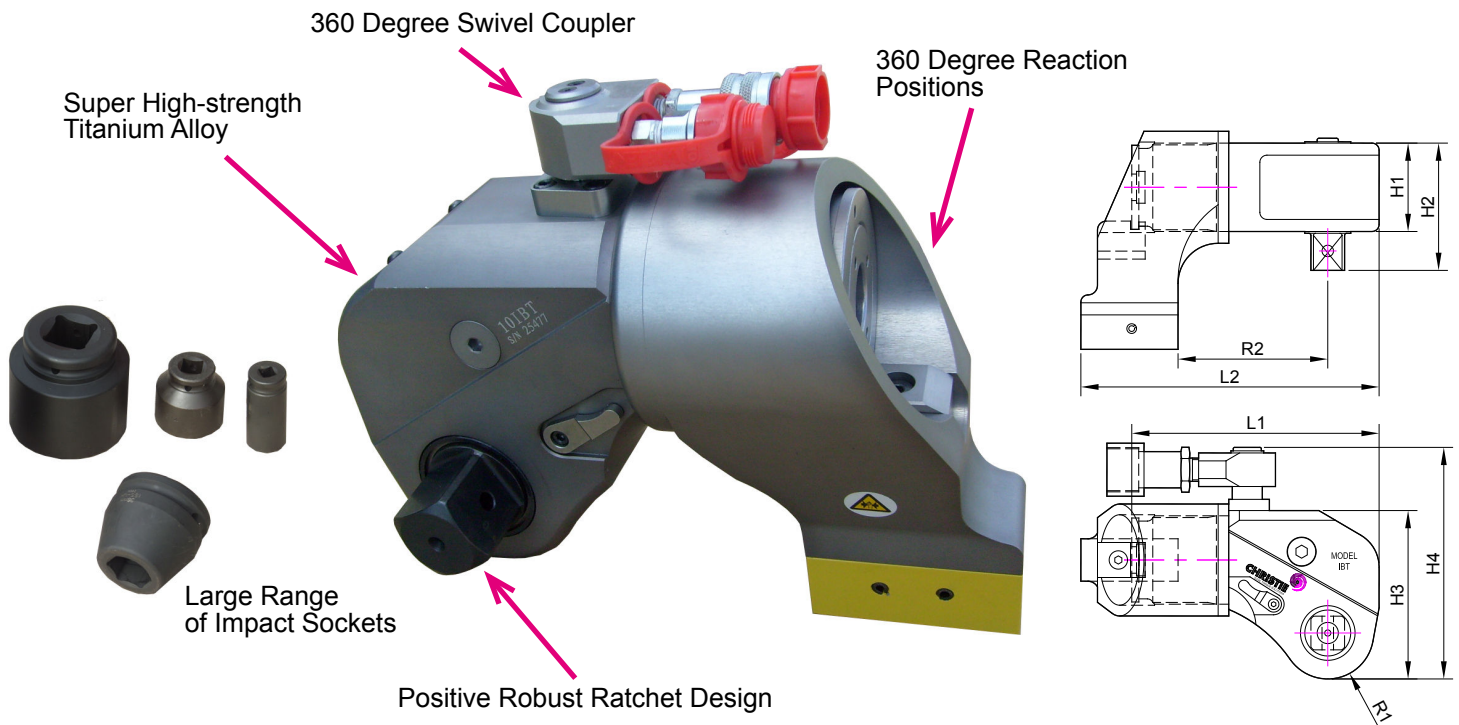

Model	Bolt Size Range	Square Drive	Torque Range	L1	L2	H1	H2	H3	H4	R1	R2	Tool Weight
	mm											
07 IBT	14-30	3/4"	112-1070	110.8	139.3	42	65.8	76.2	108.1	20.5	68.3	1.8
1 IBT	16-36	3/4"	183-1755	144.5	173.5	50	72	96	131	26	85	2.5
3 IBT	22-48	1"	451-4310	178	229	68	95	127	176	34	114	5
5 IBT	27-56	1-1/2"	752-7190	210.5	270.5	80	123	149	199	39	137	8
8 IBT	30-64	1-1/2"	1078-10295	222	293	90	134	167	217	47	153	11
10 IBT	36-72	1-1/2"	1551-14820	245.3	317.5	100	142	182	232	51	154	15
20 IBT	42-90	2-1/2"	2666-25465	307.5	383.5	120	183	220	270	59	186	26.5
25 IBT	48-100	2-1/2"	3472-33160	323	401	137	200	247	297	66	199	35
35 IBT	64-120	2-1/2"	4866-46475	372.5	465.5	153	216	282	332	77	241	50
50 IBT	72-125	2-1/2"	7200-68760	400	516	160	223	291	341	81	259	87

• No statement or data within this literature is warranted or guaranteed to be accurate.

Whilst every effort has been made to ensure the availability of the models and specifications within this catalogue, our policy of continuous improvement means specifications and models are liable to change without notice. We reserve the right to change the specifications and models available for sale or hire and to supply equivalent products where appropriate.